

Neutronic Feasibility Studies for LEU Conversion of the HFR Petten Reactor

N.A. Hanan, J.R. Deen, and J.E. Matos

Argonne National Laboratory
Argonne, Illinois 60439-4841 USA

J.A. Hendriks, P.J.M. Thijssen, and F.J. Wijtsma

Nuclear Research and consultancy Group
Petten, the Netherlands

Presented at the
2000 International Meeting on
Reduced Enrichment for Research and Test Reactors

October 1-6, 2000

Las Vegas, Nevada

The submitted manuscript has been created by the University of Chicago as Operator of Argonne National Laboratory ("Argonne") under Contract No. W-31-109-ENG-38 with the U.S. Department of Energy. The U.S. Government retains for itself, and others acting on its behalf, a paid-up, nonexclusive, irrevocable worldwide license in said article to reproduce, prepare derivative works, distribute copies to the public, and perform publicly and display publicly, by or on behalf of the Government.

*Work supported by the US Department of Energy
Office of Nonproliferation and National Security
under Contract No. W-31-109-38-ENG.

Neutronic Feasibility Studies for LEU Conversion of the HFR Petten Reactor

N.A. Hanan, J.R. Deen, and J.E. Matos
Argonne National Laboratory
Argonne, IL 60439-4815

J.A. Hendriks, P.J.M. Thijssen, and F.J. Wijtsma
Nuclear Research and consultancy Group
Petten, The Netherlands

ABSTRACT

Design and safety analyses to determine an optimum LEU fuel assembly design using U_3Si_2 -Al fuel with up to 4.8 g/cm^3 for conversion of the HFR Petten reactor were performed by the RERTR program in cooperation with the Joint Research Centre and NRG. Credibility of the calculational methods and models were established by comparing calculations with recent measurements by NRG for a core configuration set up for this purpose. This model and methodology were then used to study various LEU fissile loading and burnable poison options that would satisfy specific design criteria.

INTRODUCTION

The Joint Research Centre (JRC) and Nuclear Research and consultancy Group (NRG) located in Petten, The Netherlands, and the RERTR program at Argonne National Laboratory are engaged in a joint study leading to conversion of the HFR-Petten research reactor from HEU to LEU fuel. The study has three phases^{1,2} specified by JRC and NRG. Phase 1 results are described in this paper. The objective is to determine the number of fuel plates per assembly, the uranium density in the fuel meat, and the burnable poison in the sideplates that will extend the fuel cycle length from 25.7 days with the current HEU fuel to 28.3 days with LEU fuel, maximize thermal neutron fluxes in both in-core and ex-core experiment facilities, and satisfy all of the safety requirements.

Phase 2 will begin in October 2000 and consists of nine technical qualification aspects for the fuel. These include irradiation testing of two LEU prototype fuel assemblies and performing the analyses that are needed to revise the technical specifications and safety analysis report. Phase 2 is expected to be completed in the Spring of 2002. Work on Phase 3 to update the HFR license reference documentation is scheduled to be completed by the end of 2003. LEU fuel is planned to be procured in 2004, with conversion beginning in 2005 and ending before May 2006.

The first step in performing the studies for Phase 1 was to establish credibility of the calculation models and methodology by comparing measured and calculated results for a recent HEU core that was well characterized. NRG performed a special set of measurements for this purpose after a long shutdown in April 2000. A calculational model and methodology were then jointly developed by ANL and NRG to calculate key measured values. This same model and methodology were then used to study various LEU fuel assembly design options using U_3Si_2 -Al fuel with up to 4.8 g U/cm^3 and different burnable poisons.

“CREDIBILITY” CORE AND MODEL DESCRIPTION

Figure 1 shows a schematic diagram of the HFR core containing 17 aluminum “license plugs” that was set up by NRG in April 2000 to make measurements that will be used to establish the credibility of the calculational methods and models for this study.

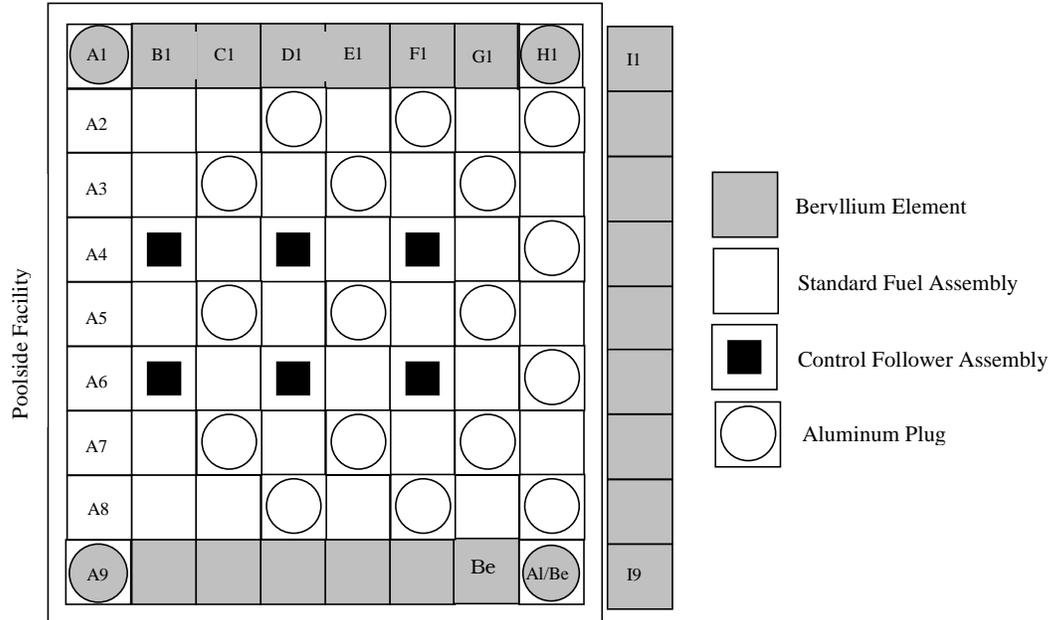


Figure 1. HFR Core Configuration for Measurements and Calculations

NRG provided measurements of the axial distribution of uranium at 15 nodes for each fuel assembly, critical control rod positions, calculated concentrations of Sm-149 in each fuel assembly, and the estimated poison content of each beryllium reflector assembly. ANL built detailed computer models of the HFR using both the DIF3D diffusion theory code³ and the MCNP Monte Carlo code⁴. Nuclear cross sections in seven energy groups for use with diffusion theory were generated using the WIMS-ANL code⁵. ENDF/B-VI and selected JEF2.2 cross sections were used in the continuous energy MCNP code.

Burnup calculations were done by ANL using the REBUS burnup code⁶ with the control rods parked at the “average” position for a typical operating cycle in order to: obtain (1) the same uranium masses by fuel assembly as the NRG measurements; (2) boron masses in the sideplates, (3) boron axial distributions, and (4) fission product concentrations other than Xe and Sm-149. Burnable poison and fission product concentrations obtained in this manner and the uranium axial distributions measured by NRG were then used in a detailed MCNP model with eight axial burnup zones per assembly and control rods set at the measured critical positions specified by NRG. Calculated eigenvalues for the critical reactor are shown in Table 1 for cases with and without the beam tubes and aluminum structural materials in the reflector.

Table 1. Calculated Eigenvalues Using the MCNP Monte Carlo Code and HFR Model

Nuclear Cross Sections*	Beam Tubes and Reflector Structure	k-eff	Excess Reactivity % dk/k
ENDF/B-VI	Not Included	0.99090 ± 0.00019	-0.92 ± 0.02
JEF2.2 Al and ²³⁵ U	Not Included	1.00087 ± 0.00013	$+0.09 \pm 0.01$
JEF2.2 Al and ²³⁵ U	Included	0.99951 ± 0.00018	-0.05 ± 0.02

The reactivity worth of the beam tubes and aluminum structural materials in the reflector was calculated to be 0.14 ± 0.02 % dk/k using the JEF2.2 Al and ^{235}U data shown in Table 1.

Two other reactivity measurements performed by NRG were calculated by ANL:

- (1) Complete withdrawal the aluminum plug in position C5, leaving this position filled with water, required that the control rods be withdrawn a distance of 0.79 cm to bring the reactor to critical. Simulation of this experiment in the ANL MCNP model with the control rods withdrawn 0.79 cm gave $k\text{-eff} = 1.00059 \pm 0.00020$ (using the unperturbed reflector model).
- (2) The differential reactivity worth of one control rod was measured by NRG and used to obtain a reactivity worth of 0.405% dk/k/cm for all six control rods. A value of 0.496 ± 0.024 % dk/k/cm was calculated by ANL using the MCNP code.

In addition to these measurements, the license plug in position C5 was replaced by an iridium radioisotope production facility. To bring the reactor to critical, the control rods had to be withdrawn a distance of 1.69 cm. The results of this experiment were used by ANL in the Monte Carlo model to determine the ^{10}B concentration that would provide the equivalent reactivity worth of a “mockup” iridium radioisotope production facility. This ^{10}B equivalent concentration was then used in all of the HEU and LEU core analysis to determine the optimum LEU fuel assembly design.

All of the calculations described so far in this section used axial uranium distributions that were measured by NRG. A calculation in MCNP was also done using uranium and burnable poison distributions computed for eight axial burnup zones per fuel assembly using the REBUS code with all of the control rods parked at an “average” position for a typical operating cycle. A $k\text{-eff}$ of 0.99669 ± 0.00017 was obtained using these axial distributions in the MCNP model – a reduction of about 0.42% dk/k in comparison with the $k\text{-eff}$ value of 1.00087 ± 0.00013 shown in Table 1 using measured axial uranium distributions.

Both NRG and ANL agree that the methods and models used in this section are able to predict reactivity parameters for the HFR reasonably well.

*The difference between ENDF/B-VI and JEF2.2 Al and ^{235}U results are primarily due to different thermal absorption cross sections for aluminum in the two cross section libraries. We would like to note that the “best” cross section value has not been determined, even though the JEF2.2 Al and ^{235}U data give results that are closer to measured data for the reactor system. For example, the thermal absorption cross section for aluminum in the JEF3 library is close to the ENDF/B-VI value. Cross sections for all calculations in this study were derived from ENDF/B-VI libraries, except that JEF2.2 libraries were used for Al and ^{235}U . However, the cross section differences described in this paragraph will not change the conclusions derived from this study.

LEU FUEL ASSEMBLY OPTIMIZATION STUDIES

Objectives for LEU Fuel Assembly Design

The main parameters considered for the LEU fuel assembly design are the number of fuel plates per assembly, the uranium density in the fuel meat, and the type and quantity of the burnable poison. The fuel type is U_3Si_2 -Al dispersion fuel with up to 4.8 g U/cm^3 . This is a well-qualified fuel³ that has been licensed for use in many research reactors, including the 70 MW OSIRIS reactor in France, the 50 MW R2 reactor in Sweden, and the 50 MW JMTR reactor in Japan. The burnable poison is either boron/Al incorporated into the sideplates or cadmium wires inserted between the fuel plates and sideplates.

The first criterion for an acceptable fuel assembly design is that the LEU equilibrium core needs to operate for 28.3 full power days per cycle (instead of 25.7 days in the HEU core) and have an excess reactivity of about 1% dk/k at end-of-cycle with the control rods fully-withdrawn. The second objective is to maximize the thermal neutron flux or a particular reaction rate in specific experiment facilities. The third objective is to minimize the motion of the control rods during an operating cycle by adjusting the type and quantity of the burnable poison. All safety margins must be satisfied to have an acceptable design. Shutdown margins for prescribed states of the reactor are addressed in this paper. Analyses of the thermal-hydraulic safety margins, mainly the margin to onset of flow instability, are not yet complete.

Computational Procedures

Figure 2 shows a schematic diagram of the HFR core with an experiment load that was specified by NRG for use in these optimizations studies. The first step was to perform a burnup calculation using the REBUS code⁴ with diffusion theory flux solutions⁵ to obtain isotopic compositions for the fuel and burnable poison as a function of burnup. Calculations were done in 3D with eight axial burnup zones and with all six control rods and fuel followers parked at their approximate average height during an operating cycle. The control rods were inserted to this average setting in the burnup calculations in order to obtain more realistic axial distributions for the fuel and burnable poisons. Nuclear cross sections with seven energy groups were generated as a function of burnup using the WIMS-ANL code⁶.

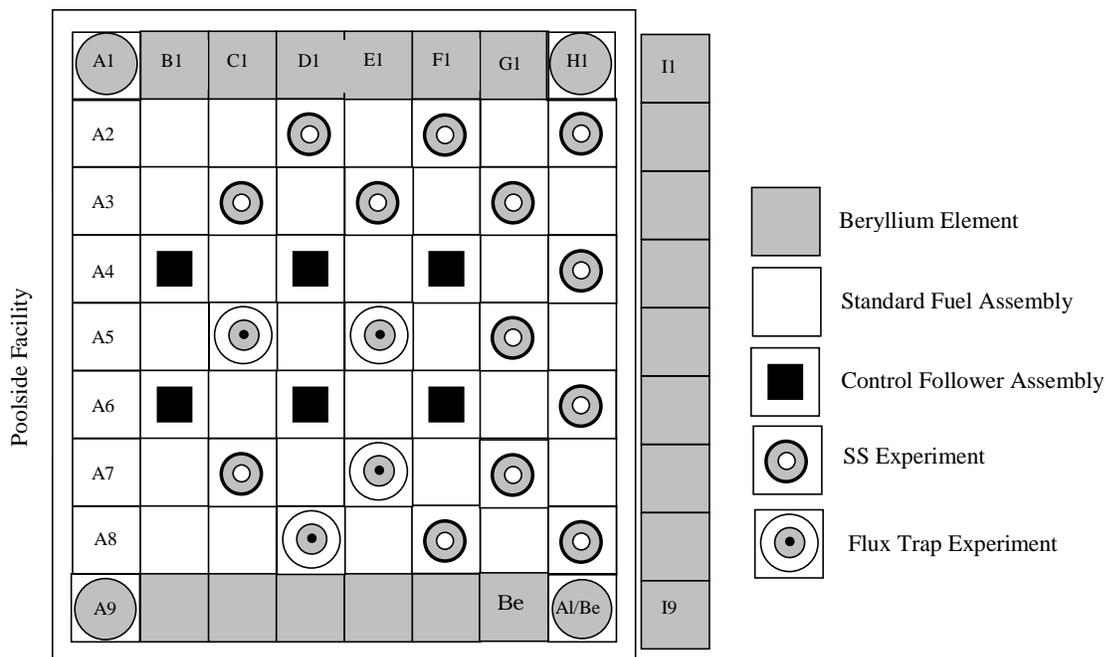


Figure 2. HFR Core with Typical Experiment Load

The material compositions at end-of-equilibrium cycle from the REBUS code were then used in the detailed Monte Carlo model to compute the excess reactivity at end-of-cycle with the control rods fully withdrawn. Material compositions from the middle of the equilibrium cycle were used in a second Monte Carlo calculation to compute fluxes and reaction rates in the specific experiment regions. Additional Monte Carlo calculations were also done using the so-called "License Core" at the beginning of the equilibrium cycle without xenon to check that all shutdown margin requirements are satisfied. These shutdown margin calculations will be described in a later section.

Number of Fuel Plates per Assembly

LEU standard assemblies with 20 and 21 fuel plates were considered. The control follower assemblies had 17 fueled plates in each case. All clad thicknesses were 0.38 mm. A fuel assembly with 21 plates, 0.65 mm thick fuel meat, 4.8 g U/cm³, and 200 mg ¹⁰B in each of the two sideplates gave an excess reactivity of about -0.6% dk/k at the end of a 28.3 day equilibrium cycle with the control followers fully-withdrawn. Since this excess reactivity is less than the goal of about +1% dk/k under the same conditions, the 21 plate case was not pursued further. All subsequent LEU calculations use a design with 20 fuel plates per standard assembly and 0.76 mm thick fuel meat.

Design, Reactivity, and Performance Summary

Table 2 summarizes key fuel assembly design and experiment performance parameters for the HEU core with ¹⁰B in the sideplates and LEU cores with two different types of burnable poison. One type is the same as the ¹⁰B poison in the sideplates of the HEU assemblies. The second type consists of 20 cadmium wires with diameters of 0.4 mm and 0.5 mm per sideplate or 40 cadmium wires per fuel assembly.

Table 2. Summary of Design, Reactivity and Experiment Performance Parameters at 45 MW.
The HEU core has a cycle length of 25.7 days. The LEU cores have a cycle length of 28.3 days.

C a s e	Enrichment, %	Burnable Poison per Sideplate	Plates per FA Std./ Control Follower	Uran. Dens., g/cm ³	g ²³⁵ U per FA Std./ Control Follower	EOC Excess React., CR Out % dk/k	Oper. Cycle React. Swing % dk/k	LEU/HEU Performance Ratios		
								Average Th. Flux Poolside Facility n/cm ²	¹⁰ B React. Rate, Flux Trap	Average Th. Flux SS Expt. n/cm ²
UAl _x -Al Fuel, Inside-Out Fuel Shuffling Pattern										
1	93	500 mg ¹⁰ B	23/19	1.09/96	450/310	0.76	1.31	-	-	-
U ₃ Si ₂ -Al Fuel, Inside-Out Fuel Shuffling Pattern										
2*	19.75	200 mg ¹⁰ B	20/17	4.63	527/424	1.04	~2.15	0.92	0.94	0.89
3	19.75	0.4 mm Cd	20/17	4.5	512/412	1.04	1.98	0.91	0.96	0.90
4	19.75	300 mg ¹⁰ B	20/17	4.8	546/440	0.99	1.38	0.89	0.92	0.88
5*	19.75	0.5 mm Cd	20/17	4.6	523/422	0.95	~1.13	0.90	0.95	0.90
6	19.75	0.5 mm Cd	20/17	4.8	546/440	1.74	0.95	0.89	0.94	0.89
U ₃ Si ₂ -Al Fuel, Outside-In Fuel Shuffling Pattern										
7	19.75	0.5 mm Cd	20/17	4.8	546/440	1.40	2.04	0.99	0.91	0.85
U7Mo-Al Fuel, Outside-In Fuel Shuffling Pattern										
8	19.75	0.5 mm Cd	20/17	5.0	569/458	1.25		0.97	0.90	0.82
9	19.75	0.5 mm Cd	20/17	5.2	592/477	1.92		0.96	0.90	0.82

*Interpolated from data at 4.5 g U/cm³ and 4.8 g U/cm³.

Calculations with LEU U_3Si_2-Al fuel were done with uranium densities of 4.5 and 4.8 g/cm^3 and the results interpolated to the values shown in Table 2. These LEU optimization studies used the same inside-out fuel shuffling pattern as for the HEU core. The results of using an outside-in fuel shuffling pattern with U_3Si_2-Al and U_7Mo-Al fuels are described in later sections.

End of Cycle Excess Reactivity

All of the LEU cases in Table 2 have an excess reactivity of about 1% dk/k or greater at end-of-cycle with the control rods fully withdrawn. These reactivity data were obtained from MNCP calculations using fuel and poison compositions obtained from the REBUS diffusion theory burnup calculations.

Boron versus Cadmium Burnable Poison

Figure 3 shows the shape of the reactivity profiles for a typical operating cycle. The LEU cases with 300 mg ^{10}B per sideplate and twenty 0.5 mm diameter cadmium wires per sideplate have nearly the same shape as the reactivity profile for the HEU core. The LEU cases with 200 mg ^{10}B per sideplate and 0.4 mm cadmium wires have nearly the same shape as each other, but the curves are steeper than that for the HEU core, indicating that more control rod movement than in the HEU core would be required during each LEU fueled operating cycle. The final choice of the burnable poison depends on criteria and preferences of JRC and NRG.

The cadmium wire cases require a smaller ^{235}U loading per fuel assembly to obtain the end-of cycle excess reactivity and burnup swing over an operating cycle because the cadmium is almost completely burned out after 2-3 cycles. With boron, there is always a residual, even after six residence cycles, that requires additional ^{235}U to compensate for the reactivity loss. In addition, fuel assemblies with cadmium wires inserted between the fuel plates and the sideplates may be less expensive to manufacture than fuel assemblies with boron/Al incorporated into the sideplates.

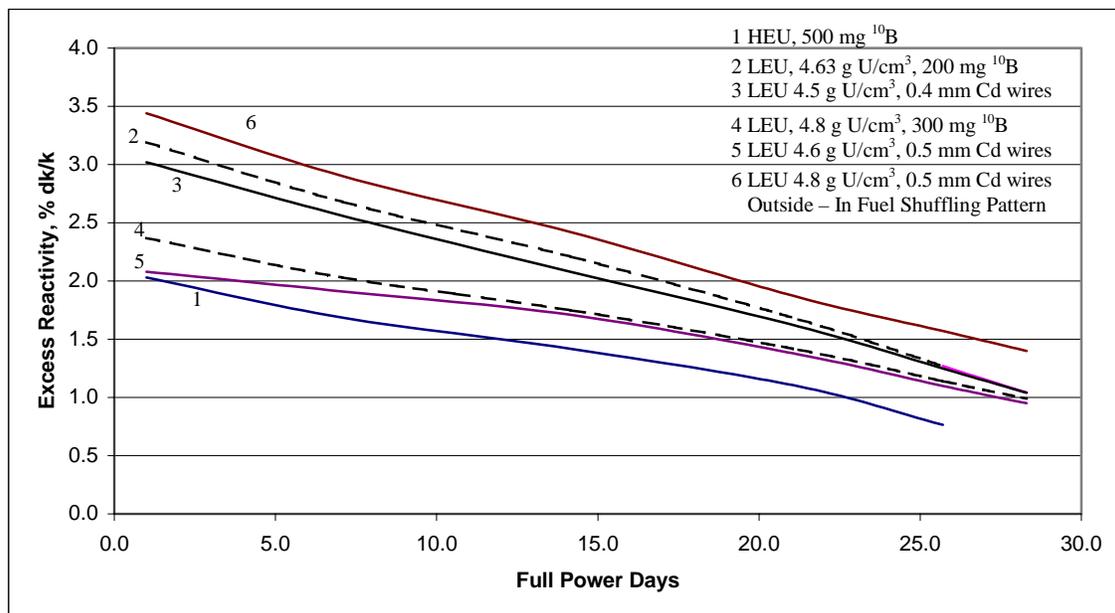


Figure 3. Reactivity Shapes for One Operating Cycle using LEU Fuel with ^{10}B or Cd as the Burnable Poison.

Experiment Performance and Core Power Distributions

Using the same inside-out fuel shuffling pattern in the LEU and the HEU cores, the LEU thermal fluxes are about 10% lower than the HEU thermal fluxes in the poolside facility at the locations where target plates are irradiated to produce Mo-99. The main reasons for the 10% loss in thermal flux are the higher ^{235}U loading needed with LEU fuel and the higher ^{235}U loading in the LEU control fuel followers* than in the HEU followers, relative to the standard assemblies. Because of their higher fissile loading, more power is generated in the LEU followers than in the HEU followers. As a consequence, less power is generated in the A-row of fuel assemblies adjacent to the poolside facility. This shift in the core power distribution is responsible for part of the thermal flux loss in the poolside facility. A less important reason for some of the thermal flux loss is the higher ^{235}U loading needed to extend the cycle length to 28.3 days in the LEU core from 25.7 days in the HEU core.

*Note: The plates in the current HEU fuel followers have a uranium density that is 12% lower than in the plates of the standard assemblies, thus requiring two fuel plate fabrication specifications (See Table 2). For the LEU cores, NRG has requested that the fuel plates in the standard and control follower assemblies have the same uranium density in order to reduce fuel fabrication costs.

There is essentially no difference in thermal fluxes in the poolside facility between using LEU fuel with boron or cadmium as the burnable poison. The reason is that fluxes in the poolside facility are strongly influenced by the amount of power generated in the A-row of fuel assemblies adjacent to the poolside facility. Since the fuel assemblies in the A-row are relatively highly burned using the current inside-out fuel shuffling pattern, most of the initial boron or cadmium content is burned out. Thus, the type of burnable poison has little influence on the fluxes in the poolside facility.

Additional calculations showed that the power generated in fuel assemblies in the A-row (see Fig. 4) and the thermal flux in the poolside facility of LEU cores with a reactor power of 50 MW (an increase of 11%) approximately match those of the HEU core operated at a power of 45 MW.

Inside-Out versus Outside-In Fuel Shuffling Patterns

One option to restore some of the thermal flux loss in the poolside facility is to change the fuel shuffling pattern in the LEU core from the current inside-out pattern to an outside-in pattern in which several fresh

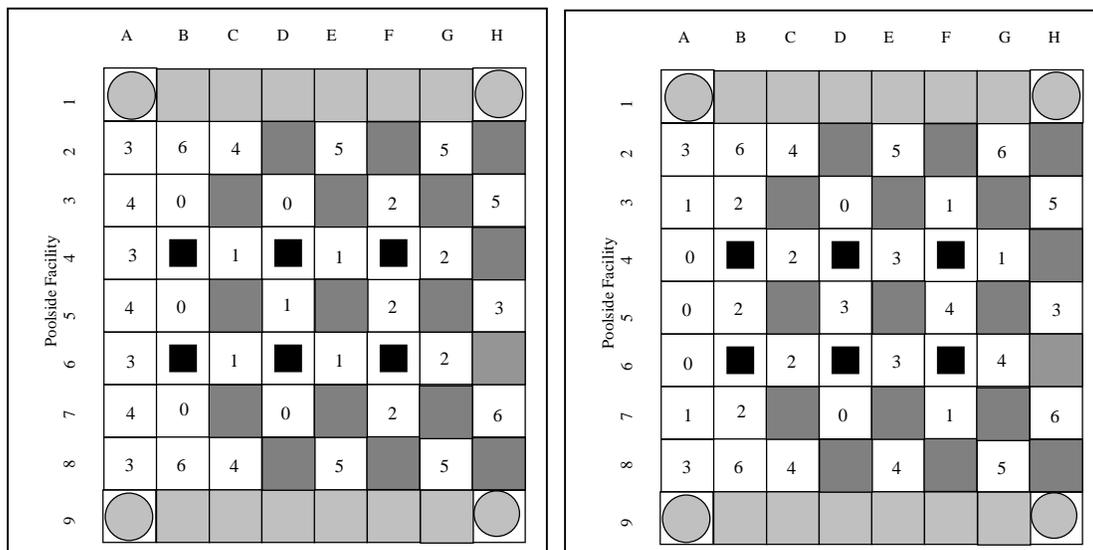


Figure 4. Comparison of Current HEU Inside-Out Fuel Shuffling Pattern (Left) and One Possible LEU Outside-In Fuel Shuffling Pattern (Right).

fuel assemblies are inserted in the A-row. This would shift the core power distribution toward the poolside facility and increase the thermal neutron flux there. Figure 4 compares the inside-out fuel shuffling pattern used in the current HEU core and one possible outside-in fuel shuffling pattern in the LEU core. The numbers on the fuel assemblies in Fig. 4 indicate the number of residence cycles each assembly has been in the core.

The results of calculations are shown in Table 2 for an LEU core using fuel assemblies containing 4.8 g U/cm³ U₃Si₂-Al fuel, twenty 0.5 mm cadmium wires as the burnable poison, and the outside-in fuel shuffling pattern shown in Fig. 4. The excess reactivity at the end of the equilibrium cycle is 1.4% dk/k, about 0.3% dk/k lower than with the inside-out fuel shuffling pattern. The LEU/HEU thermal flux ratio in the poolside facility has increased to 0.99 from 0.90 since more of the reactor power has been shifted to the A-row of fuel assemblies. The shutdown margin with the two most reactive control rods stuck out of the core is about -1.3% dk/k, which meets operational safety requirements (see following section for discussion of shutdown margins).

However, one potential drawback is that the reactivity swing between one day and 28.3 days of operation is about 2.0% dk/k. This is nearly the same swing as for the LEU cases with the inside-out shuffling pattern and either 200 mg ¹⁰B or 0.4 mm Cd wires as the burnable poison (see Fig. 3), but is larger than the corresponding reactivity swing of 1.3% dk/k for the HEU core. We estimate that with a fuel assembly design with 4.8 g U/cm³, 300 mg ¹⁰B as the burnable poison, and the outside-in shuffling pattern shown in Fig. 4 would have an end-of-cycle excess reactivity of about 0.7% dk/k.

Isotopic Uranium Contents of LEU Metal

An end-of-cycle excess reactivity that is greater than 1% dk/k would allow flexibility to offset potential additional reactivity losses due to variations in the isotopic assay of low-enriched uranium procured from different sources. A reactivity loss of ~0.35% dk/k was calculated and included in all results shown in this paper for typical DOE LEU metal containing 0.22 wt-% ²³⁴U and 0.1 wt-% ²³⁶U.

Larger isotopic contents of ²³⁴U and ²³⁶U would result in larger reactivity losses. Several calculations were done to determine “rules-of thumb” for estimating reactivity losses due to different isotopic contents of ²³⁴U and ²³⁶U in LEU fuel in the HFR. The results gave a reactivity loss of ~1.2% dk/k per 1.0 wt-% ²³⁴U and a reactivity loss of ~0.4% dk/k per 1.0 wt-% ²³⁶U. As an example, the ASTM specification with a maximum ²³⁴U content of 1.0 wt-% and a maximum ²³⁶U content of 4.0 wt-% would produce an estimated reactivity loss of about 2.8% dk/k in the HFR. The fuel cycle cost penalties could be substantial. These results indicate that the isotopic contents of ²³⁴U and ²³⁶U should be considered carefully in procuring LEU metal to be used for fuel fabrication.

U7Mo-Al Fuel Meat versus U₃Si₂-Al Fuel Meat

In addition to using U₃Si₂-Al fuel, calculations for a fuel assembly design with 20 plates and twenty 0.5 mm cadmium wires per sideplate were also done to determine the uranium density that would be needed if the fuel meat were changed to a dispersion of U7Mo (7 wt-% Mo, 93 wt-% U) in aluminum. If U7Mo-Al fuel is qualified for reactor use, it may be a viable option for replacing the U₃Si₂-Al fuel. As shown in Table 2, U7Mo-Al fuel with about 5.0 g U/cm³ would be needed to replace U₃Si₂-Al fuel with 4.8 g U/cm³ in the HFR. Thermal flux performance in the poolside facility is expected to be about 2% lower with LEU U7Mo-Al fuel than with LEU U₃Si₂-Al fuel for the same fuel shuffling pattern.

Shutdown Margins

Shutdown margins were calculated or estimated from similar calculations for each of the cases shown in Table 2, but for the “License Core” configuration in which experiments inside the core are replaced by aluminum plugs containing a central water hole. The HFR has three conditions on shutdown margin in its Technical Restrictions and Safety Regulations⁷ for the “License Core”. These are: (a) the maximum excess reactivity of the core may not exceed 15% dk/k; (b) the reactor must remain subcritical for each

core configuration and during the total fuel cycle, when the two most effective control rods are withdrawn completely while the remaining control rods are fully inserted; and (c) the reactor must remain subcritical when all control rods are moved out over a length corresponding to half of their total reactivity worth. To further ensure safe reactor operation, NRG operating procedures state that for condition (b), the subcriticality of the core must never be less than 1% dk/k.

Calculations were performed for each of these shutdown margin criteria for the cases in Table 2. The results shown in Table 3 indicate that all shutdown margin criteria are satisfied.

Table 3. Summary of Design and Shutdown Margin Parameters at 45 MW.

The HEU core has a cycle length of 25.7 days. The LEU cores have a cycle length of 28.3 days.

Case	Enrichment, %	Burnable Poison per Sideplate	Plates per FA Std./Control Follower	Uran. Dens., g/cm ³	g ²³⁵ U per FA Std./Control Follower	EOC Excess React., CR Out % dk/k	Shutdown Margin Criteria For License Core		
							BOC Excess React. CR Out % dk/k	Core Sub-Crit. with all CR Withdrawn to Half Worth	Shutdown Margin with Two Highest Worth CR Out, % dk/k
UAl _x -Al Fuel, Inside-Out Fuel Shuffling Pattern									
1	93	500 mg ¹⁰ B	23/19	1.09/.96	450/310	0.76	8.65	-4.93	-2.70
U ₃ Si ₂ -Al Fuel, Inside-Out Fuel Shuffling Pattern									
2*	19.75	200 mg ¹⁰ B	20/17	4.63	527/424	1.04	8.89	-4.33	-2.72
3	19.75	0.4 mm Cd	20/17	4.5	512/412	1.04	9.07	-4.23	-2.89
4	19.75	300 mg ¹⁰ B	20/17	4.8	546/440	0.99	9.12	-3.63	-2.35
5*	19.75	0.5 mm Cd	20/17	4.6	523/422	0.95	9.17	-4.13	-2.79
6	19.75	0.5 mm Cd	20/17	4.8	546/440	1.74	8.87	-3.75	-2.67
U ₃ Si ₂ -Al Fuel, Outside-In Fuel Shuffling Pattern									
	19.75	0.5 mm Cd	20/17	4.8	546/440	1.40	9.36	-3.09	-1.29
U-7Mo Fuel, Outside-In Fuel Shuffling Pattern,									
7	19.75	0.5 mm Cd	20/17	5.0	569/458	1.25	9.02	-3.28	-1.6

* Interpolated from data at 4.5 g U/cm³ and 4.8 g U/cm³.

CONCLUSIONS

Detailed models of the HFR reactor for use in Monte Carlo and diffusion theory burnup calculations were set up by ANL in cooperation with NRG. The results of calculations using these models agreed reasonably well with key reactivity measurements made by NRG on a special HFR configuration set up for this purpose. These comparisons established the credibility of the models and methods for predicting HFR reactivity parameters.

JRC and NRG specified the reactor performance characteristics that were desired for an optimal LEU fuel assembly design. These included extending the operating cycle to 28.3 days from the current 25.7 days, an excess reactivity of about 1% dk/k at end-of-cycle, minimizing motion of the control rods during a cycle, and maximizing neutron flux performance in the experiment facilities. All safety margins must be satisfied.

ANL performed analyses for LEU fuel assembly designs with U_3Si_2 -Al fuel with up to 4.8 g U/cm³ in the fuel meat and either borated sideplates or cadmium wires as the burnable poison. The specified performance criteria were used to guide the parameter choices. Two LEU design options that are approximately equivalent using the same inside-out fuel shuffling pattern in both the HEU and LEU cores are: (1) 300 mg ¹⁰B per sideplate and 4.8 g U/cm³ in the fuel meat of assemblies containing 20 fuel plates with 0.76 mm thick fuel meat and (2) twenty cadmium wires with a diameter of 0.5 mm per sideplate along with fuel meat containing 4.6 g U/cm³ in the same 20 plate geometry. All three of the shutdown margin criteria specified in the HFR operating license were shown to be satisfied. However, the main drawback is that the thermal flux in the poolside facility is reduced by about 10% in the LEU fuel cases. The main reasons for this flux loss are the increased ²³⁵U loading needed with LEU fuel and the reduced amount of power generated in the row of fuel assemblies adjacent to the poolside facility.

One option that was studied to restore most of this performance loss is to change the fuel shuffling pattern to one in which several fresh fuel assemblies are inserted into the row of the core that is adjacent to the poolside facility. Calculations using an LEU fuel assembly design with 20 plates, 4.8 g U/cm³ in U_3Si_2 -Al fuel, 0.76 mm thick fuel meat, and twenty 0.5 mm cadmium wires per sideplate gave an LEU/HEU thermal flux ratio of 0.99 in the poolside facility. The excess reactivity at end-of-cycle was +1.4% dk/k and the shutdown margin with the two most reactive control rods stuck out of the core and the others fully inserted was -1.3% dk/k. The reactivity swing over an operating cycle would be about 2.0% dk/k, 0.7% dk/k larger than with the current HEU core.

Calculations for a fuel assembly design with 20 plates, 0.76 mm thick fuel meat, and twenty 0.5 mm cadmium wires per sideplate showed that U7Mo-Al dispersion fuel with a uranium density of 5.0 g/cm³ would be a direct replacement for U_3Si_2 -Al fuel with 4.8 g U/cm³ in the HFR, if U7Mo-Al fuel is qualified for reactor use. Thermal flux performance in the poolside facility is expected to be about 2% lower with LEU U7Mo-Al fuel than with LEU U_3Si_2 -Al fuel for the same fuel shuffling pattern.

The uranium isotopic contents of LEU metal can result in significant reactivity losses that could increase fuel cycle costs. Calculations for the HFR gave a reactivity loss of ~1.2% dk/k per 1.0 wt-% ²³⁴U and a reactivity loss of ~0.4% dk/k per 1.0 wt-% ²³⁶U. These results indicate that the isotopic contents of ²³⁴U and ²³⁶U should be considered carefully in procuring LEU metal to be used for fuel fabrication.

Analyses of the thermal-hydraulic safety margins, mainly the margin to onset of flow instability, are currently in progress.

This study shows that it is feasible to convert the HFR to LEU silicide fuel with a uranium density that is equal to or less than 4.8 g/cm^3 if the thermal-hydraulic safety margins are shown to be adequate. A variety of other options to maximize fluxes in the experiment regions have not been explored at this time. However, the choices will clearly involve some studies with the goal of maximizing economic utilization.

REFERENCES

1. J. Guidez and A. Gevers, JRC, and F.J. Wijtsma, P.J.M. Thijssen, and J.A. Hendriks, NRG, "Status in 2000 of the High Flux Reactor Fuel Cycle", these proceedings.
2. J.A. Hendriks, P.J.M. Thijssen and F. Wijtsma, NRG, and A. Gevers and J. Guidez, JRC, "Status of the Conversion Working Plan in the High Flux Reactor (Petten/The Netherlands)", Trans. 4th International Topical Meeting on Research Reactor Fuel Management, March 19-21, 2000, Colmar, France.
3. United States Nuclear Regulatory Commission, "Safety Evaluation Report Related to the Evaluation of Low-Enriched Uranium Silicide-Aluminum Dispersion Fuel for Use in Non-Power Reactor", NUREG-1313 (July 1988).
4. B.J. Toppel, "A User's Guide for the REBUS-3 Fuel Analysis Capability", ANL-83-2, Argonne National Laboratory, Argonne, IL (March 1983).
5. K.L. Derstine, "DIF3D: A Code to Solve One-, Two-, and Three-Dimensional Finite Difference Diffusion Theory Problems", ANL-82-64, Argonne National Laboratory, Argonne, IL (April 1984).
6. J.R. Deen, W.L. Woodruff, C.I. Costescu, and L.S. Leopando, "WIMS-ANL User Manual, Rev. 3, ANL/TD/TM99-07, Argonne National Laboratory, Argonne, IL (October 1999).
7. "Technical Restrictions and Safety Regulations Applying to the Operation of the High Flux Reactor", 23 May 1988.